


STRETCHER AND FIRE SERVICE ELEVATORS

SECTION 3.5.4.1 OF THE ONTARIO BUILDING CODE MANDATES THAT FOR BUILDINGS MORE THAN 3 STORIES HIGH, AT LEAST ONE ELEVATOR NEEDS TO BE PROVIDED THAT CAN ACCOMMODATE A PATIENT STRETCHER 2010MM (80") LONG AND 610MM (24") WIDE IN THE PRONE POSITION. THE OPTIONS BELOW MEET THESE REQUIREMENTS WITH ALLOWANCE FOR 125MM (5") RADIUS CORNERS

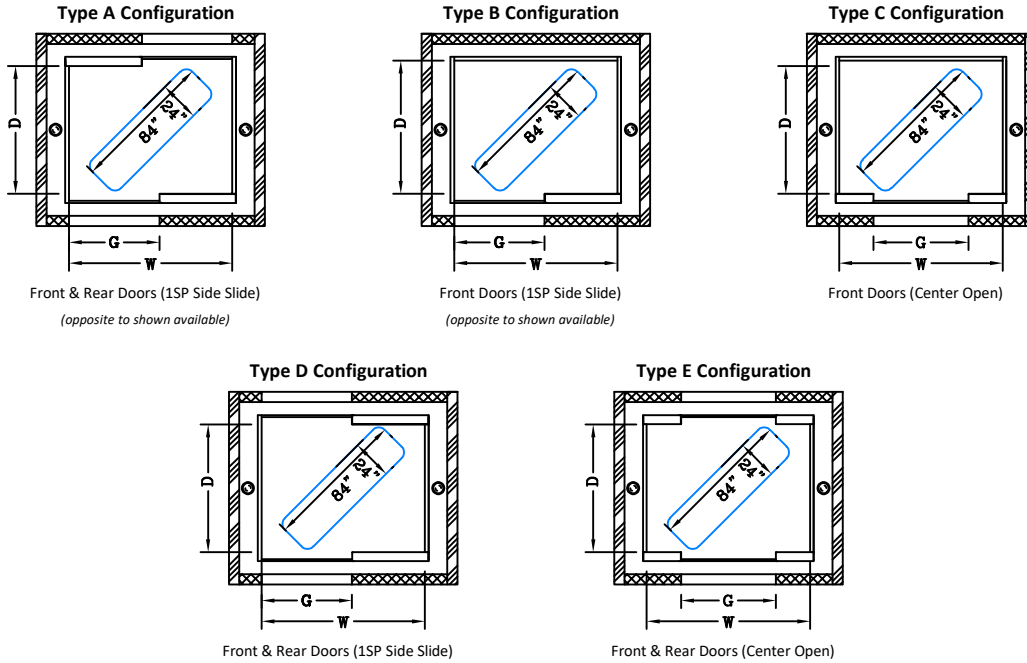

Capacity (lbs/kg)	Configuration Type	Inside Clear (W x D)	Front/Rear	Door Type	Door Width (G)	FSAE Compliant
2500 1160	A	68" x 51.5" 1727mm x 1308mm	F/R	1-SP Side Slide (Staggered)	3'-6" 1067mm	No
3000 1380	B	68" x 57" 1727mm x 1448mm	F	1-SP Side Slide	3'-6" 1067mm	No
3000 1380	A	68" x 57.5" 1727mm x 1461mm	F/R	1-SP Side Slide (Staggered)	3'-6" 1067mm	No
3500 1600	B	68" x 65" 1727mm x 1651mm	F	1-SP Side Slide	3'-6" 1067mm	Yes
3500 1600	A	68" x 65.5" 1727mm x 1664mm	F/R	1-SP Side Slide (Staggered)	3'-6" 1067mm	Yes
4000 1815	B	92" x 65" 2339mm x 1651mm	F	1-SP Side Slide	3'-6" 1067mm	Yes
4000 1815	C	92" x 65" 2339mm x 1651mm	F	Center Open	4'-0" 1219mm	Yes
4000 1815	A & D	92" x 65.5" 2339mm x 1664mm	F/R	1-SP Side Slide	3'-6" 1067mm	Yes
4000 1815	E	92" x 65.5" 2339mm x 1664mm	F/R	Center Open	4'-0" 1219mm	Yes

FOR SPECIFIC REQUIREMENTS SEE SECTION 3.3.1.7 AND 3.5.4.1 OF THE ONTARIO BUILDING CODE