
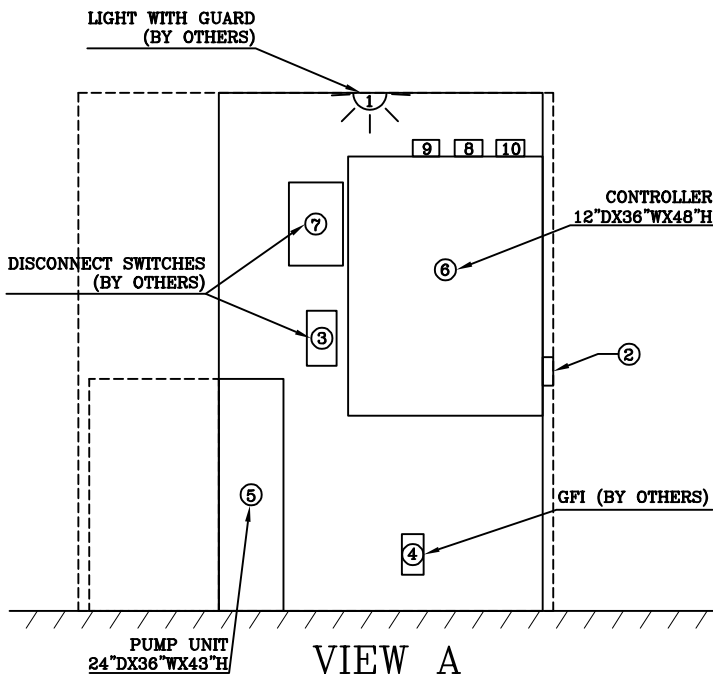


MACHINE CLOSET FOR PASSENGER ELEVATOR

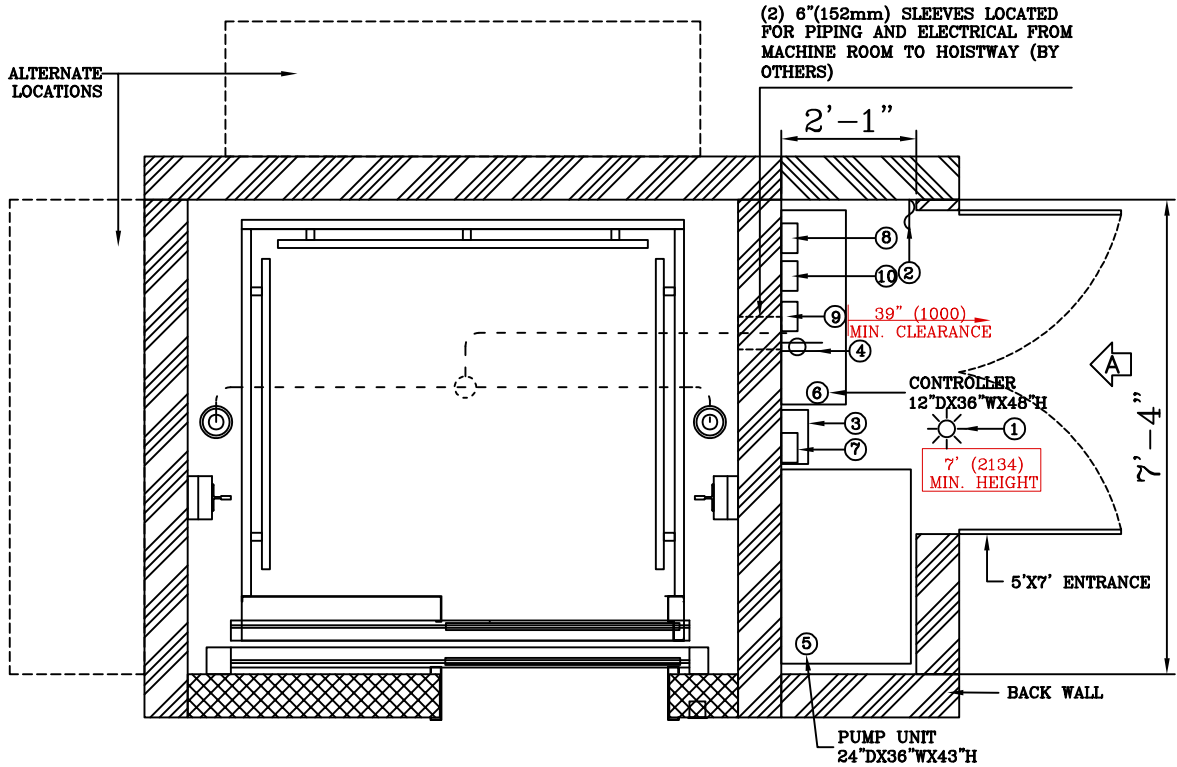

LEGEND

1. LIGHT FIXTURE
 2. LIGHT SWITCH
 3. MAIN DISCONNECT SWITCH(FUSED, 3 POLE)
*NOTE: DISCONNECT MUST PROVIDE AN AUXILIARY CONTACT FOR EMERGENCY BATTERY TO PREVENT ACCIDENTAL OPERATION OF LIFT DURING SERVICING.
 4. G.F.I. DUPLEX RECEPTACLE
 5. HYDRAULIC UNIT
 6. CONTROLLER
 7. CAR LIGHT DISCONNECT 120VAC, 15A(FUSED)
 8. ETHERNET LINE WITH INTERNET ACCESS
 9. THERMOSTAT TO CONTROL TEMPERATURE IN ROOM FROM 5°C TO 30°C
 10. N/O DRY CONTACTS FOR CONNECTION TO SMOKE DETECTORS FROM LANDINGS, MACHINE ROOM & TOP OF HOISTWAY, INCLUDING WIRING TO ELEVATOR CONTROLLER
- ITEMS 1,2,3,4,7,8,9&10 TO BE PROVIDED BY OTHERS